

## LED WHITELIGHT™ RECESSED-MOUNT DOME LAMP

### FEATURES & BENEFITS

- Encapsulant potting for total circuit board protection
- Robust, one-piece, aluminum housing and removable acrylic lens (LED versions)
- Built-in automatic thermal protection circuit



**TECHNICAL SPECIFICATIONS**  
Material: Aluminum/Acrylic  
Finish: White

61291





61261



61F61



61511

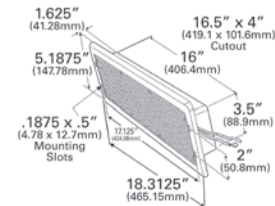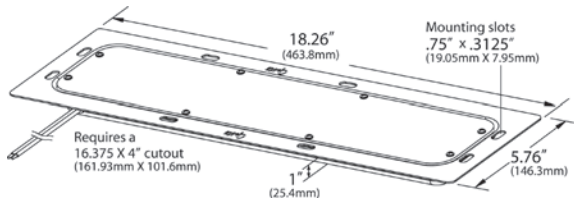

Part Number	Product Description	Lighting Technology	Light Output (Usable)	Operating Temperature	Design Voltage (V)	Amp Draw (A)
61611	High output, 18 diodes	LED	1200 Lm	-40F to +122F	12	2.16
61G21	High output, 18 diodes, w/motion sensor	LED	1200 Lm	-40F to +122F	12	2.16
61E61 <b>NEW</b>	High output, 18 diodes, dimmable	LED	1200 Lm	-40F to +122F	12	2.17/.71
61111	High output, 16 diodes	LED	1000 Lm	-40F to +122F	24	1
61261	Standard output, 10 diodes	LED	800 Lm	-40F to +122F	12	1.75
61F61 <b>NEW</b>	Standard output, 10 diodes w/motion sensor	LED	800 Lm	-40F to +122F	12	1.75/.02
61881	Low output, 10 diodes	LED	400 Lm	-40F to +122F	12	1.2
61291 <b>NEW</b>	Standard output, 6 diodes	LED	940 Lm	-40F to +122F	12	1.7
61H91 <b>NEW</b>	Standard output, 6 diodes w/motion sensor	LED	940 Lm	-40F to +122F	12	1.7/.02
61511	Standard output, interior dome	Fluorescent	950 Lm	0F to +125F	12	2.5

### Accessories

Part Number	Description	Fits
94621	Replacement Lens	Round Corner Lenses
94631	Replacement Lens	Square Corner Lenses
92901	Replacement Lens	61511
92911	Fluorescent Tube	61511
43540	Mounting Pan	All 18" Dome Lamps

