



**30<sup>®</sup> Series Products**  
**2" Sealed**

**Material:**

- Polycarbonate lens & housing
- PVC grommet
- 16 gauge wire

**Light Source:**

- 15,000 hr rated 12v bulb life
- 12v designed at 14v, 0.33 amp, 2 cp
- 24v designed at 28v, 0.17 amp, 3 cp

**Kit Components:**

**30503R/Y lamp kits:**

- 1 - 30200R/Y lamp
- 1 - 30700 grommet
- 1 - 94902 plug


**Recommended Accessories:**

- Mounting: Pages 231-233
- Plugs: Pages 187-190

**FMVSS:**

- P2,P3,PC

- Wabash & Monon replacement
- "ABS" version complies with FMVSS 108 requirement for ABS malfunction indicator lamp on trailer & ABS braking systems
- Standard PL-10 connections
- Lamp designed for PC requirements on a 45° angle in mounting devices #30720, #00801, #00803, #00804 or surface mount flange
- Replaces Signal-Stat 1030 series



**Grommet Kits**

- 30503R Red, grommet kit
- 30503Y Yellow, grommet kit

**12v Lamps**

- 30200R Red
- 30200Y Yellow
- 30200B Blue
- 30200G Green

**12v Lamp w/ABS logo**

- 30257Y Yellow, vertical
- 30230Y Yellow, horizontal

**24v Lamps**

- 30206R Red
- 30206Y Yellow
- 30206B Blue
- 30206G Green

**30<sup>®</sup> Series**  
**PC Rated Products**  
**2" Sealed**

**Material:**

- Polycarbonate lens & housing

**Light Source:**

- 15,000 hr rated 12v bulb life
- 12V designed at 14v, .33 amp, 2 cp

**Recommended Accessories:**

- Mounting: Pages 231-233
- Plugs: Pages 187-190

**FMVSS:**


- P2,PC2

- Innovative design allows one lamp ability to function as two
- Standard PL-10 connection
- Lamp designed for PC requirement on a 45° angle in grommet mounting devices #30700, #30702, #30704, #30706 & #30707

30204R SHOWN



- 30204R Red
- 30225R Red, lamp & flange
- 30204Y Yellow
- 30225Y Yellow, lamp & flange

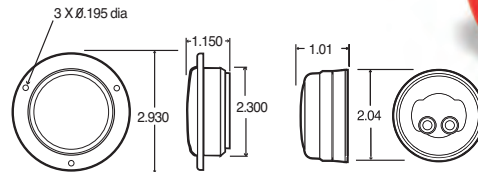

**30<sup>®</sup> Series**  
**Flange Products**  
**2" Sealed**

**Material:**

- Polycarbonate lens & flange
- 16 gauge wire

**Light Source:**

- 15,000 hr rated 12v bulb life
- Designed at 14v, 0.33 amp, 2 cp

**Recommended Accessories:**

- 97080 flange gasket
- Plugs: Pages 187-190

**FMVSS:**

- P2,PC2

- Flanges are permanently affixed to lamp
- 12 volt 15,000 hr rated bulb
- Flush mount is not suitable for PC requirements

