



PROFILE™

BEACONS

Lightbars | Minibars | Directional LEDs | Worklamps | Back-Up Alarms | Camera Systems

## 7460 SERIES

### SAE Class I LED

The compact and unobtrusive 7460 Series Profile™ LED beacon incorporates a simple, yet highly effective and robust, design featuring an overhead heatsink that also allows removal of the flange when the unit is pipe mounted. The 7460 features a unique Pulse8 flash pattern that human vision is highly sensitive to in the periphery, increasing potential visibility where vehicle hazards are not in direct line of sight. A 5-year warranty and the usual maintenance free, low amp draw benefits of LED technology make this an ideal light for any application.


#### Models

PART NO.	VOLTAGE	AMPS	FPM	LENS/ILLUMINATION	MOUNT
7460X	12-36	3.6	75	Specify Color	3 Bolt Flange/1" Pipe
7460CX	12-36	3.6	75	Clear/Specify Color	3 Bolt Flange/1" Pipe
7460X-VM	12-36	3.6	75	Specify Color	Vacuum Magnet
7460CX-VM	12-36	3.6	75	Clear/Specify Color	Vacuum Magnet

Replace X in part number with desired color: A=amber, B=blue, C=clear, G=green, R=red

#### Features and Benefits

- Eight 3-watt LEDs and a parabolic reflector
- Human peripheral vision is highly sensitive to unique Pulse8 flash pattern that features 8 flashes per cycle (80 FPM)
- Overhead heatsink design allows for unobtrusive pipe mounting with flange removed
- Meets SAE J845 Class I (A, CC, CR & R)
- CE
- Temperature Range: -22°F to +122°F (-30°C to +50°C)
- Warranty: 5 years

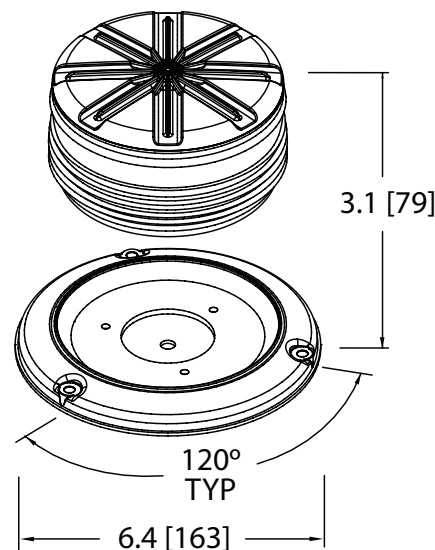

Detachable flange design allows easy and unobtrusive pole mounting

COMMERCIAL

t 800-635-5900 | f 800-688-3226 | sales@eccolink.com | www.eccolink.com



A DIVISION OF  
**ECCO**  
GROUP